

ULTIMATIC

Guarantee
10
Years



MACH 3 Nozzles

" Quick reflexes in face of a fire "





- ◆ Automatic, regulated pressure variable flow nozzles
- ◆ 7 positions (6 open + shut off) controlled by a single handle.
- ◆ Full cone spray which beats back flames and forms a protective shield
- ◆ Adjustment of the full jet to the optimal spray angle in a quarter turn
- ◆ Flush possible during operation
- ◆ Hard anodized aluminium body
- ◆ Stainless steel slide valve
- ◆ Stainless steel filter
- ◆ Unbreakable "Superblack" moulded rubber teeth.
- ◆ New wider valve handle
- ◆ New ergonomic pistol grip, available in several colours

ULTIMATIC 7 bar

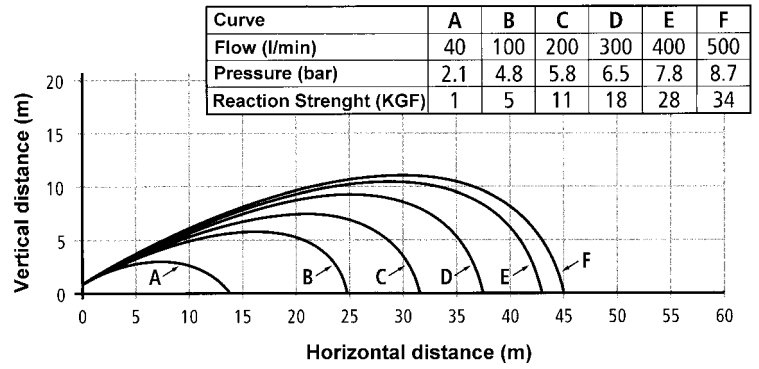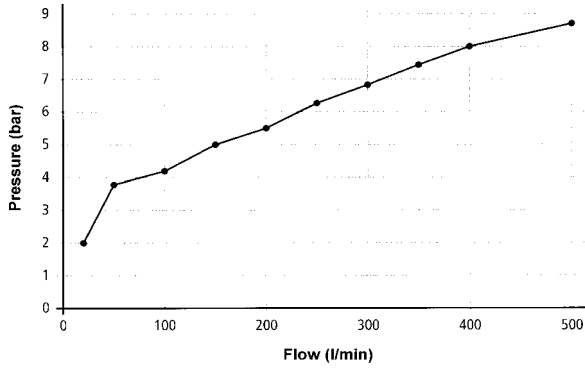

ULTIMATIC 6 bar

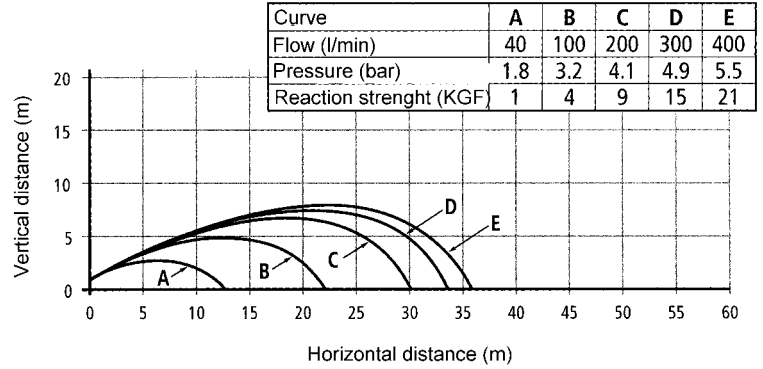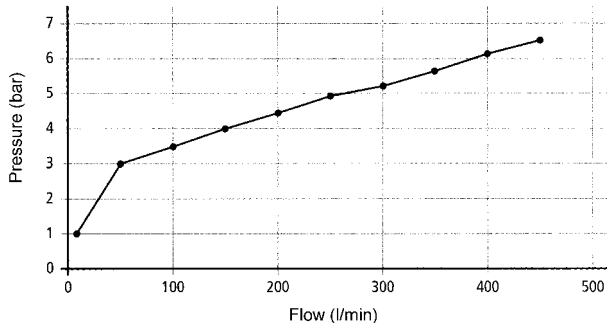

Approximate effective stream trajectory at 30 degree elevation in no wind conditions. Distance to last water drop approximately 10% further. Range of foam solution is approximately 10% less than results expected with water.

FEATURES ULTIMATIC

Model	Reference	Weight	Flowrate (l/min)	Pressure	Inlet (BSP)	Special features	Approval Authorisation
ULTIMATIC FO6	I11.20.098	1,2 kg	35 to 150	6 bar	1" Female	Positive click at 35°, special Flash Over	
ULTIMATIC FO6 INST	I11.20.111	1,5 kg	40 to 500	6 bar	Instantaneous coupling	Positive click at 35°, special Flash Over	
ULTIMATIC FO7	I11.20.058	1,5 kg	40 to 500	7 bar	1" ½ Female	Positive click at 35°, special Flash Over	
ULTIMATIC FO7 INST	I11.20.063	1,5 kg	40 to 500	7 bar	Instantaneous coupling	Positive click at 35°, special Flash Over	
ULTIMATIC FO7	I11.20.064	1,2 kg	35 to 150	7 bar	1" Female	Positive click at 35°, special Flash Over	
ULTIMATIC MN	I11.20.010	1,5 kg	40 to 400	6 bar	1" ½ Female	Spray angle lock at 40°, resettable	French Navy N° 491DEF
ULTIMATIC AA	I11.20.003	1,7 kg	40 to 500	7 bar	1" ½ Female	Flowrate lock at 250 l/min, resettable	French Air Force

* ULTIMATIC FO7 ¾" Female Ref: I11.20.052

OPTIONS : POLYFOAM ADAPTORS to produce high quality foam

	Reference	Weight	Dimensions L x W (mm)
Low expansion	I11.80.116	310 gr	165 x 95
Medium expansion	I11.80.118	1200 gr	385 x 265

AFTER SALES : Very light maintenance requirement due to the nozzle design and materials used.

As it is our policy to constantly seek to improve our products, we reserve the right to change the specifications of our equipment without notice